


Wall mounted receptacle

Part number: 75222

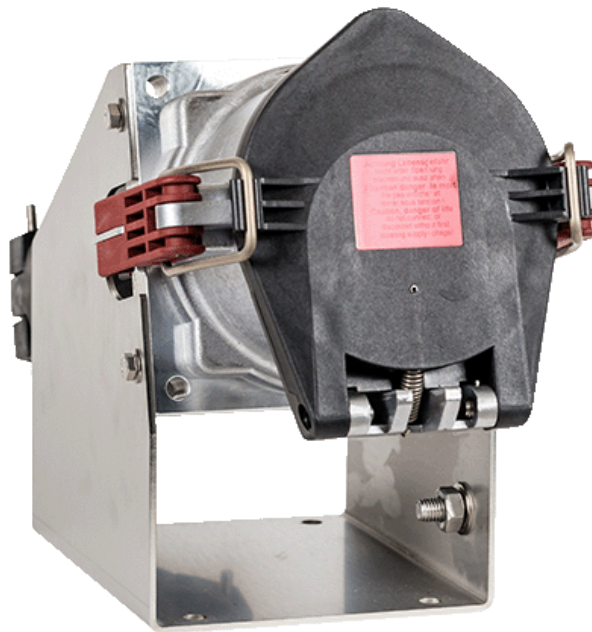

MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- EcoLine
- plastic enclosure
- aluminium front part
- nickel plated contacts, highly heat resistant contact carrier
- external fixing
- 15° inclination
- with cable gland
- sea water products are available on request
- if required, pilot cables can be introduced separately into enclosures, please add "PK" to the part number

Technical Details

Wall mounted receptacle	75222
Ampere	200A
Number of poles	4p
Clock position	7h
Nominal voltage AC	500V
Nominal frequency	50 - 60 Hz
Protection type IP	IP67
Contact carrier	nickel plated contacts, highly heat resistant contact carrier
X-CONTACT	no
Connection	cage terminals
Contact screw drive	allen key
Pilot contact	2 pilot contacts
Pilot contact switch	no
Blind cable entry at the rear	no
Enclosure base can be turned 180°	no
Insertion direction	angled
Inclination	15°
Type of mounting	external fixing
Highly resistant to chemicals	no
Military version	no
Lockable	no
Tightening torque connection terminal	8 Nm
Strip length jacket	150 mm

Wall mounted receptacle	75222
Strip length solid conductor	30 mm
Conductor cross-section min.	35 mm ²
Conductor cross-section max.	150 mm ²
Conductor cross-section pilot max.	4 mm ²
IK code	IK10
Weight (net)	4612 g
Packaging unit	1 pcs
Quantity per pallet	48 pcs
EAN / identification number	4015394151920

Permissible ambient conditions

	Min.	Max.
Permissible ambient temperature	-40 °C	100 °C

Material properties

Housing	plastic black [no RAL colour code]
Front part	aluminium grey [no RAL colour code]
Hinged lid	plastic black [no RAL colour code]

Material resistance

The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials".

Material and environmental properties

RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

Regulations and Standards

Norm

DIN EN IEC 60309

Declaration of Conformity

CE

Dimensional Drawing

Drawing
1 MB 385

Dim. in mm

