

Panel mounted receptacle DUO

Part number: 7534



MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- pre-wired for installation
- mechanical DUO-interlock
- switch 3p
- external fixing
- straight insertion direction
- receptacles can be locked with a padlock
- highly resistant to chemicals

Technical Details

Panel mounted receptacle DUO - Part No. 7534	7534
Product serie	DUO
Ampere	32A
Number of poles	4p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP67
Contact carrier	standard
X-CONTACT	no
Pilot contact	without pilot contact
Pilot contact switch	no
Load break switch	32A 3p
DIN rail	no
Inspection window	no
Enclosure base can be turned 180°	no
Insertion direction	straight
Type of mounting	external fixing
Highly resistant to chemicals	yes
LED voltage indicator	no
Lockable	yes, with a padlock up to max. 8 mm
Conductor cross-section min.	4 mm ²
Conductor cross-section max.	10 mm ²
Weight (net)	760 g

Panel mounted receptacle DUO - Part No. 7534	7534
Packaging unit	5 pcs
Quantity per pallet	240 pcs
EAN / identification number	4015394228189

Permissible ambient conditions

	Min.	Max.
Permissible ambient temperature	-25 °C	40 °C
Average temperature over 24 hours		35 °C

Material properties

Housing	PBT/PC light grey [similar RAL 7035]
Hinged lid	PA6 red [similar RAL 3013]
	TPE black [similar RAL 9005]
	PBT/PC squirrel grey [similar RAL 7000]
Rotary handle	PA6 red [similar RAL 3013]

Material resistance

The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials".

Material and environmental properties

RoHS 2011/65/EU inkl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	no


Regulations and Standards

Norm	DIN EN IEC 60309-4
------	--------------------

Declaration of Conformity	CE
---------------------------	----

Test label	EAC, CQC
------------	----------

Dimensional Drawing

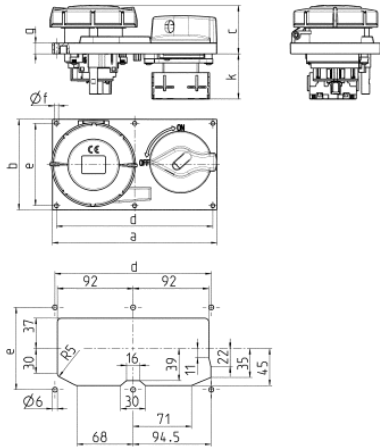

Drawing	Amp. Poles	16			32		
		3	4	5	3	4	5
5 MB 57							
Dim. in mm	a	200	200	200	200	200	200
	b	110	110	110	110	110	110
	c	47	50	51	59	59	60
	d	190	190	190	190	190	190
	e	100	100	100	100	100	100
	f	5	5	5	5	5	5
	g	13	13	13	13	13	13
	k max.	56	56	56	56	56	56